

METAL FLEX CONVEYOR BELTS (CTA)

DESCRIPCIÓN DEL PRODUCTO

These belts are made up of lateral cells joined by straight rods. The belt pitch can be adapted to the customer's needs, and it can also include edge guards if needed.

This belts are made of AISI-304 stainless steel and with chain pitches of 19,05mm, 25,04mm and 27,43mm.

The property which makes these belts so versatile is their capacity to alternate straight and curved sections.

For widths bigger than 1200mm, a third central cell is recommended to prevent the rods from bowing.


Widely encountered in the food industry.




METAL FLEX CONVEYOR BELTS (CTA)



METAL FLEX CONVEYOR BELTS (CTA)

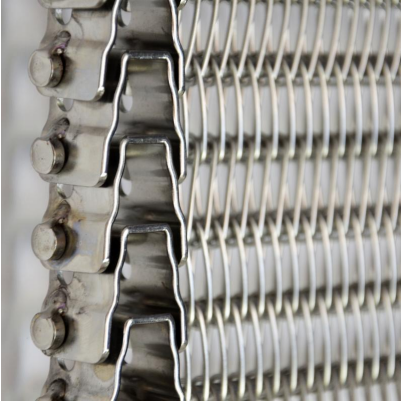


METAL FLEX CONVEYOR BELTS (CTA)

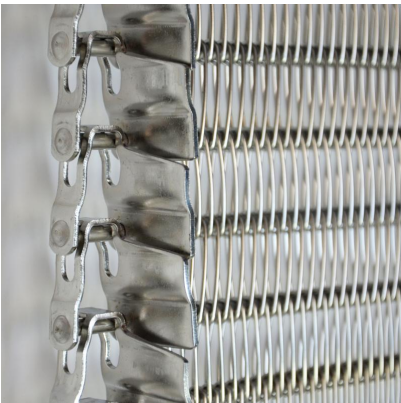

METAL FLEX CONVEYOR BELTS WITH EDGE GUARDS (CTA)


PLANO DEL PRODUCTO

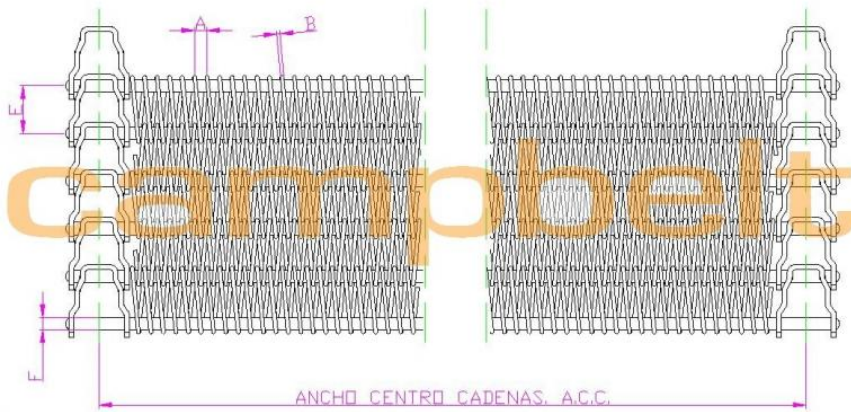

METAL FLEX CONVEYOR BELTS (CTA)

APLICACIONES

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed ultricies ligula id ligula pellentesque, non pharetra odio imperdiet. Duis dapibus auctor erat. In at nulla aliquet, mollis sapien in, sagittis leo. Fusce eu lacus eget metus vulputate dapibus et eu urna. Morbi ultrices enim et tincidunt malesuada. Nulla ultricies ac justo in condimentum.



	Min.	Max.
B = Hilo espiras	1,2	2
A = Paso de espiras	2,4	19
D = Hilo varillas	5	6
Paso cadenas	19,05	25,4
Ancho max.	1.500	
Radio de giro	1' (1,5xW)	3/4 (2,2xW)

Aplicación CTA